


PWPI-3SC-5X8

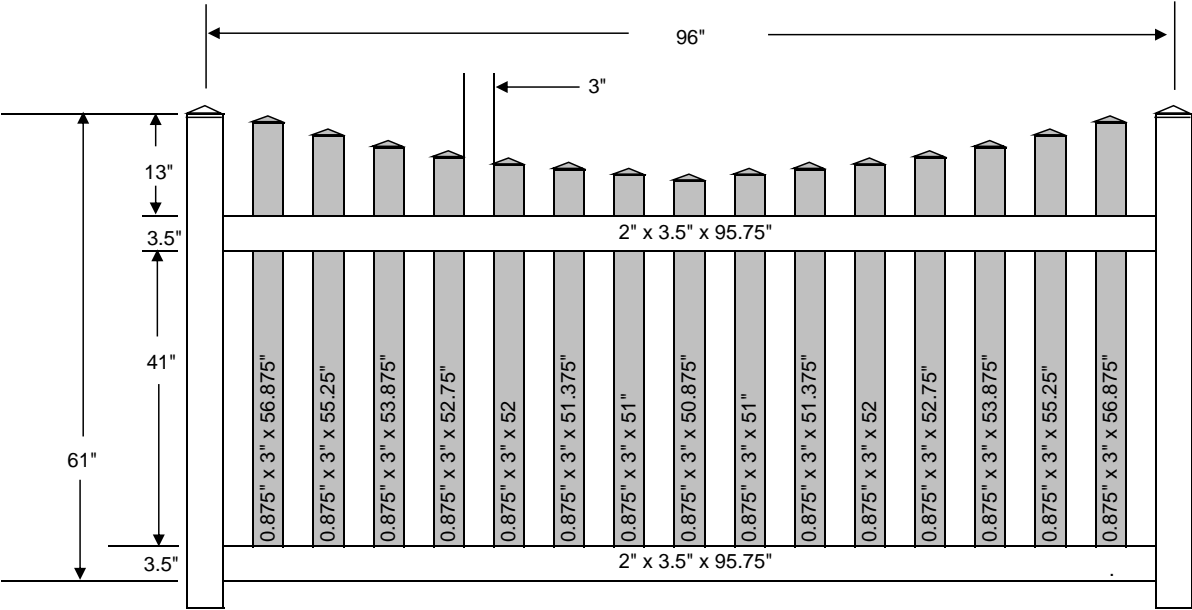

Panel can accommodate a slope of 10" over 8' using the racking method

1

Material List			
Qty	Item	Dimensions	Pulled From
1	Top Rail	2" x 3.5" x 95.75"	2" x 3.5" x 96" Rail
1	Bottom Rail	2" x 3.5" x 95.75"	2" x 3.5" x 96" Rail
1	Aluminum	1.5" x 3.25" x 95.75"	8" "H" Insert
2	Pickets	0.875" x 3" x 56.875"	0.875" x 3" x 59"
2	Pickets	0.875" x 3" x 55.25"	0.875" x 3" x 59"
2	Pickets	0.875" x 3" x 53.875"	0.875" x 3" x 59"
2	Pickets	0.875" x 3" x 52.75"	0.875" x 3" x 59"
2	Pickets	0.875" x 3" x 52	0.875" x 3" x 59"
2	Pickets	0.875" x 3" x 51.375"	0.875" x 3" x 59"
2	Pickets	0.875" x 3" x 51"	0.875" x 3" x 59"
1	Picket	0.875" x 3" x 50.875"	0.875" x 3" x 59"
15	Picket Caps	0.875" x 3"	0.875" x 3"

- * Actual measurement may vary slightly.
- * Spade picket caps may be substituted with Dog Ear picket caps.
- * Maximum rise/drop over the length of panel is 16" (2" rise per 12" of run)
- * The holes on uderside of top rail are enlarged to allow panel to rack.
- * Put a small amount of glue around the inside of the picket before inserting cap.