PWPI-3R5.5SC-4X8

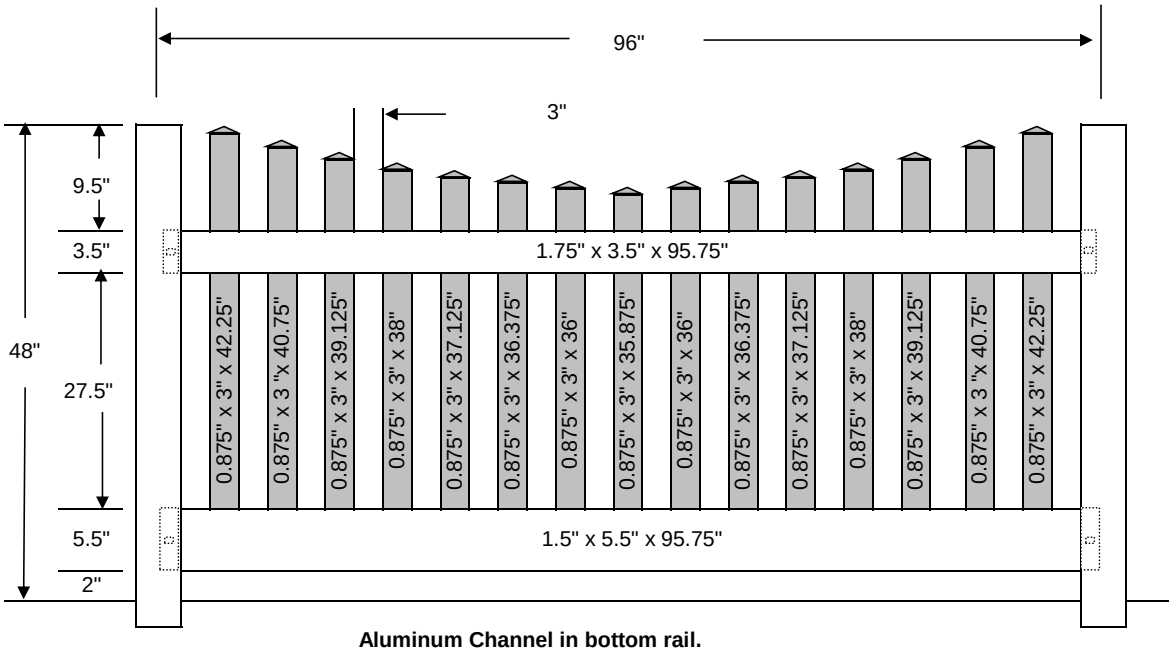

Aluminum Channel in bottom rail.

Pickets are shaded for illustration only.

Panel can accommodate a slope of 10" over 8' using the racking method

1

Material List

Qty	Item	Dimensions	Pulled From
1	Top Rail	1.75" x 3.5" x 95.75"	1.75" x 3.5" x 96" Rail
1	Bottom Rail	1.5" x 5.5" x 95.75"	1.5" x 5.5" x 96" Rail
1	Aluminum	1.25" x 1.75" x 95.75"	8' "I" Insert
2	Pickets	0.875" x 3" x 42.25"	0.875" x 3" x 47"
2	Pickets	0.875" x 3 "x 40.75"	0.875" x 3" x 47"
2	Pickets	0.875" x 3" x 39.125"	0.875" x 3" x 47"
2	Pickets	0.875" x 3" x 38"	0.875" x 3" x 47"
2	Pickets	0.875" x 3" x 37.125"	0.875" x 3" x 47"
2	Pickets	0.875" x 3" x 36.375"	0.875" x 3" x 47"
2	Pickets	0.875" x 3" x 36"	0.875" x 3" x 47"
1	Pickets	0.875" x 3" x 35.875"	0.875" x 3" x 47"
15	Picket Caps	0.875" x 3"	0.875" x 3"

* Actual measurement may vary slightly.
* Spade picket caps may be substituted with Dog Ear picket caps.
* Maximum rise/drop over the length of panel is 16" (2" rise per 12" of run)
* The holes on uderside of top rail are enlarged to allow panel to rack.
* Put a small amount of glue around the inside of the picket before inserting cap.
** Amount varies per order.

PWPI-3R5.5SC-4X8