

USA Vinyl LLC

TEST REPORT

SCOPE OF WORK

CXR-AR42-A10

REPORT NUMBER

210422012SHF-001

TEST DATE(S)

2021-04-22 - 2021-05-12

ISSUE DATE

2021-05-13

PAGES


22

DOCUMENT CONTROL NUMBER

LFT-APAC-SHF-OP-10k(May 1, 2021)

© 2021 INTERTEK

Intertek Testing Services Shenzhen Ltd. Shanghai Fengxian Branch

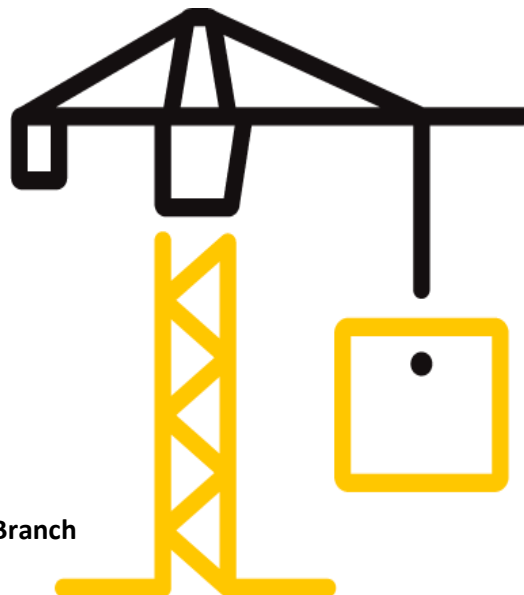

Test Report

Statement

- 1.This report is invalid without company's special seal for testing on assigned page.
- 2.This report is invalid without authorized person's signature.
- 3.This report is invalid where any unauthorized modification indicated.
- 4.Don't copy this report in partial (except full copy) without any official approval in written by our company. This report is invalid without re-stamping the special seal for testing in copying report.
- 5.Any holder of this document is advised that this report is for the exclusive use of Intertek's Customer and is provided pursuant to the agreement between Intertek and its Customer. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. This report was made with due care within the limitation of a defined scope of work and on the basis of information, materials and instructions received from the Customer or its nominated third parties. Intertek is under no obligation to refer to or report upon any facts or circumstances which are outside the specific instructions received and accepts no responsibility to any parties whatsoever, following the issue of the report, for any matters arising outside the agreed scope of the works. The tests results are not intended to be a recommendation for any particular course of action. Customer is responsible for acting as it sees fit on the basis of such results.
- 6.Intertek's written consent is required to use Intertek's name or logo on the object, product or service being tested. The observations and test results in this report relate only to the sample under test. This report alone does not indicate that the item, product or service has passed any Intertek certification program.
- 7.The report was digital signed by Shang Hai, Intertek Group plc, please using Adobe Acrobat Reader to verify the authenticity.

Test Report

Issue Date: 2021-05-13 Intertek Report No. 210422012SHF-001
 Applicant: USA Vinyl LLC
 Address: 5795 Green Pointe Drive S Groveport , OH 43125
 Attn: Brad Halley
 Test Type : Performance test, samples provided by the applicant.

Product Information

Product Name	CXR-AR42-A10	Brand	Weatherable
Sample Description	Good Condition	Sample Amount	3 sets
		Received Date	2021-04-13
Sample ID	Model	Specification	
S210422012SHF.001~003	CXR-AR42-A10	10'x42"	

Test Methods And Standards

Test Standard	ICC-ES AC 273 Approved February 2008 (Editorially revised March 2016), Section 4.2.2, 4.2.3, 4.2.4
Specification Standard	ICC-ES AC 273 Approved February 2008 (Editorially revised March 2016), Section 4.2.2, 4.2.3, 4.2.4 2015 International Building Code (IBC) 2015 International Residential Code (IRC)
Test Conclusion	The samples were tested according to the above standards, and the results are shown in the following page.




Note:

1.This report relates specifically to the sample(s) that were drawn and provided by the applicant or their nominated third party. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and/or shipment and only relate to the sample(s) as received and tested.

Test Conclusion

The samples were tested according to the above standards, and the results are shown in the following page. In conclusion, this product up to 42" high x 10' wide meets 2015 IBC All Use Groups (section 1607.8.1)

Report Authorized

 <hr/> Name: Sally Xie Title: Approver	  <hr/> Name: Daniel Zhang Title: Reviewer	 <hr/> Name: Jackie Zhou Title: Project Engineer
---	---	---

Test Report

Issue Date: 2021-05-13

Intertek Report No. 210422012SHF-001

Test Items, Method and Results:

Test Items	Test Method	Test Result	Requirement	Verdict
In-fill load test	ICC-ES AC 273 Approved February 2008 (Editorially revised March 2016), Section 4.2.2	Withstood load equal to 125 lbf (556 N) without failure after load at three positions. Position 1: Center of middle three pickets; Position 2: Right of top two pickets; Position 3: Left of bottom two pickets.	The test specimen shall be capable of satisfactorily resisting a load of 125 lbf (556 N) applied over a one-square foot area. After test, there shall be no failure, nor evidence of disengagement of any component, nor visible cracks in any component.	Pass

Note:

- Reference to IBC 2015 section 1607.8.1

Test Photo:



In-fill load position 1



In-fill load position 2



In-fill load position 3

Test Report

Issue Date: 2021-05-13

Intertek Report No. 210422012SHF-001

Test Items, Method and Results:

Test Items	Test Method	Test Result	Requirement	Verdict
Uniform load test	ICC-ES AC 273 Approved February 2008 (Editorially revised March 2016), Section 4.2.3	Withstood load equal to 125 plf (1825 N/m) without failure. Loads were applied vertically and in an outward direction at an angle of 45 degrees from horizontal.	<p>The top rail of the guard and handrail test specimens shall be subjected to a single test where a maximum uniform load of 125 plf (1825 N/m) is applied vertically and in an outward direction at an angle of 45 degrees from horizontal.</p> <p>After test, there shall be no failure, nor evidence of disengagement of any component, nor visible cracks in any component.</p>	Pass

Note:

1. The uniform load was applied by quarter point load. The effective rail length was 120 inch. The required load shall be 1250 lbf. (Test load: $125\text{plf} \times 120\text{ inch}/12 = 1250\text{ lbf}$)
2. Reference to IBC 2015 section 1607.8.1

Test Photo:



Uniform load vertically



Uniform load with 45 degrees

Test Report

Issue Date: 2021-05-13

Intertek Report No. 210422012SHF-001

Test Items, Method and Results:

Test Items	Test Method	Test Result	Requirement	Verdict
Concentrated load test	ICC-ES AC 273 Approved February 2008 (Editorially revised March 2016), Section 4.2.4	Location: Top rail midspan between posts Deflection was 1.43 in. when the applied load reached 200 lbf (890 N). It didn't exceed the deflection limits 3.0 in. Withstood load equal to 500 lbf without failure.	A 500-lbf load (2224 N) is applied at the midspan of the top rail and at the top of a single post in an outward direction. The deflection at the point of loading shall be recorded when the load reaches 200 lbf (890 N) and shall not exceed their respective allowable deflection limits.	Pass
		Location: Top of the post Deflection was 0.39 in. when the applied load reached 200 lbf (890 N). It didn't exceed the deflection limits 3.5 in. Withstood load equal to 500 lbf without failure.	After test, the rail system should be no failure, nor any evidence of disengagement of any component, nor visible cracks in any component.	

Note:

1. The deflection limit for top rail= $h/24+L/96=3.0$ in, which h is the rail height (42 in.) and L is the rail length (120 in.). The deflection limit for post = $h/12=3.5$ in, which h is the effective newel post height (42 in.)

2. Reference to IBC 2015 section 1607.8.1

Test Photo:



Concentrated on top rail



Concentrated on post


Test Report

Issue Date: 2021-05-13

Intertek Report No. 210422012SHF-001

APPENDIX A: Drawings

Connection	Fastener
Top Rail Bracket to Post	Three 10x1", Self-drill, SCM435 screws
Bottom Rail Bracket to Post	Two #10x1", Self-drill, SCM435 screws
Top Rail Bracket to Rail	#10x3/4", Self-drill, SCM435 screws
Bottom Rail Bracket to Rail	No mechanical fastener

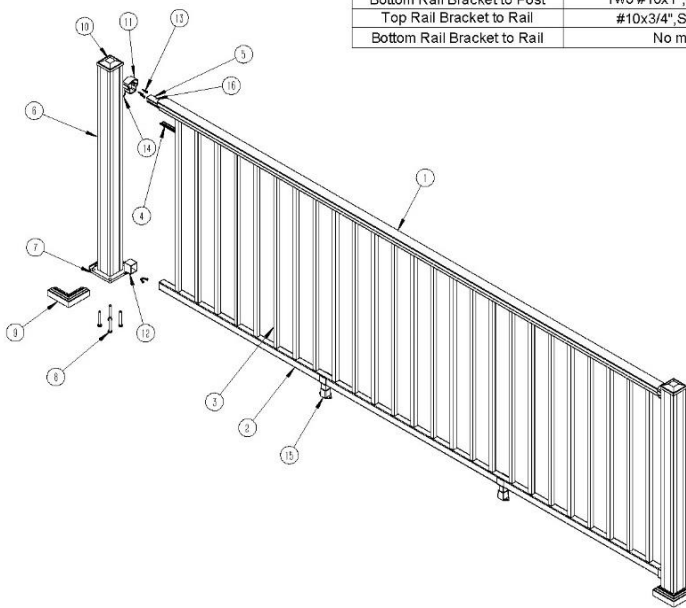

USA VINYL, LLC 5795 GREEN POINT DRIVE GROVEPORT, OH 43215	Design by		Product name	CXR-AR42-A10
	Check by		Drawing NO	CXR-AR42-A10
	Approve by		Revision	A/0
	Complete date		Sheet	1 Of 15

Test Report

Issue Date: 2021-05-13

Intertek Report No. 210422012SHF-001


Parts List			
S.N.	Item	QTY	Material
1	Top Rail 2125	1	Aluminum 6061 - T6
2	Bottom Rail 12515	1	Aluminum 6061 - T6
3	3/4 " Picket	25	Aluminum 6061 - T6
4	Spacer	26	Aluminum 6061 - T6
5	Vinyl Insert	2	Vinyl
6	3.0" Post	2	Aluminum 6061 - T6
7	Base Plate	2	Aluminum 6061 - T6
8	0.4 x 2 3/4 Bolt(Base Plate To Post)	8	SUS304
9	3.0" Post Trim	2	ADC-12
10	3.0" Post Cap	2	ADC-12
11	Top Bracket	2	ADC-12
12	Bottom Bracket	2	ADC-12
13	10# 1" Screw(All Brackets To Post)	10	SCM435
14	10# 3/4" Screw(Top Bracket To Rail)	4	SCM435
15	Bottom Rail Support	2	Aluminum 6061 - T6
16	Top Rail Insert	1	Aluminum 6061 - T6

USA VINYL, LLC 5795 GREEN POINT DRIVE GROVEPORT, OH 43215	Design by		Product name	CXR-AR42-A10	
	Check by		Drawing NO	CXR-AR42-A10	
	Approve by		Revision	A/0	Sheet 2 Of 15
	Complete date				

Test Report

Issue Date: 2021-05-13


Intertek Report No. 210422012SHF-001

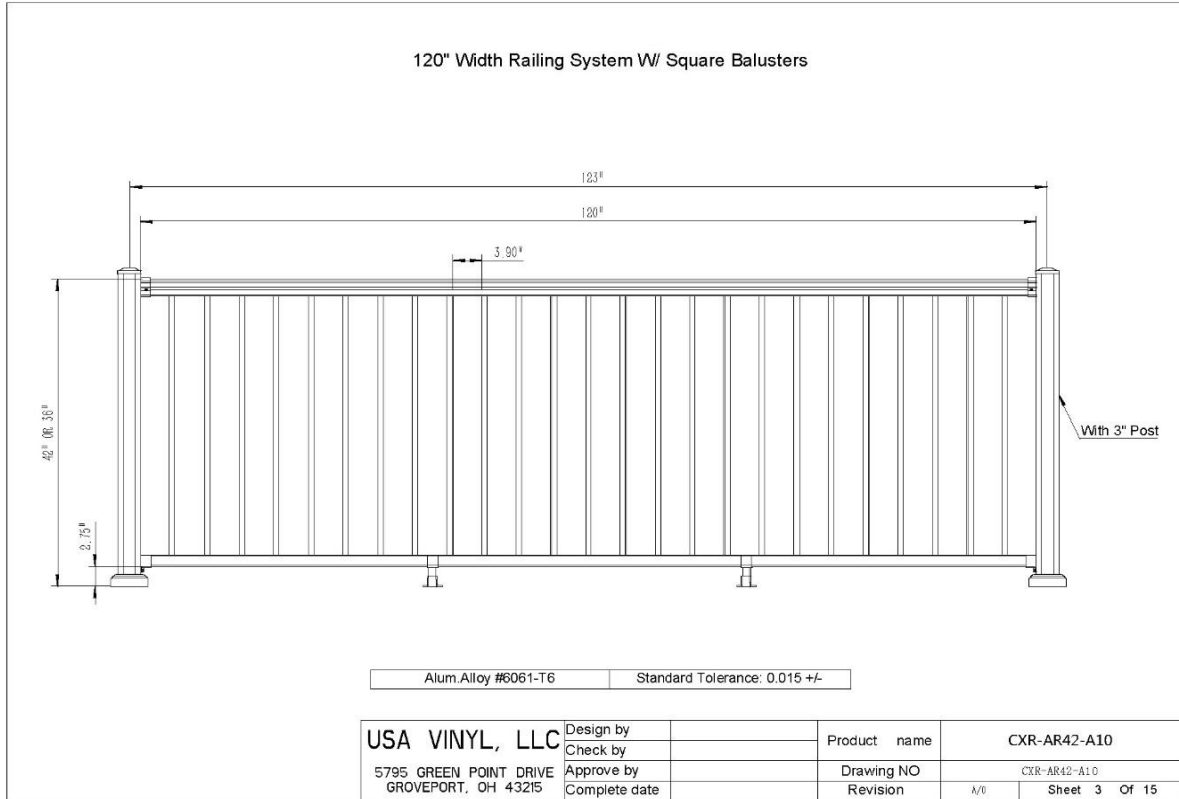

Test Report

Issue Date: 2021-05-13


Intertek Report No. 210422012SHF-001

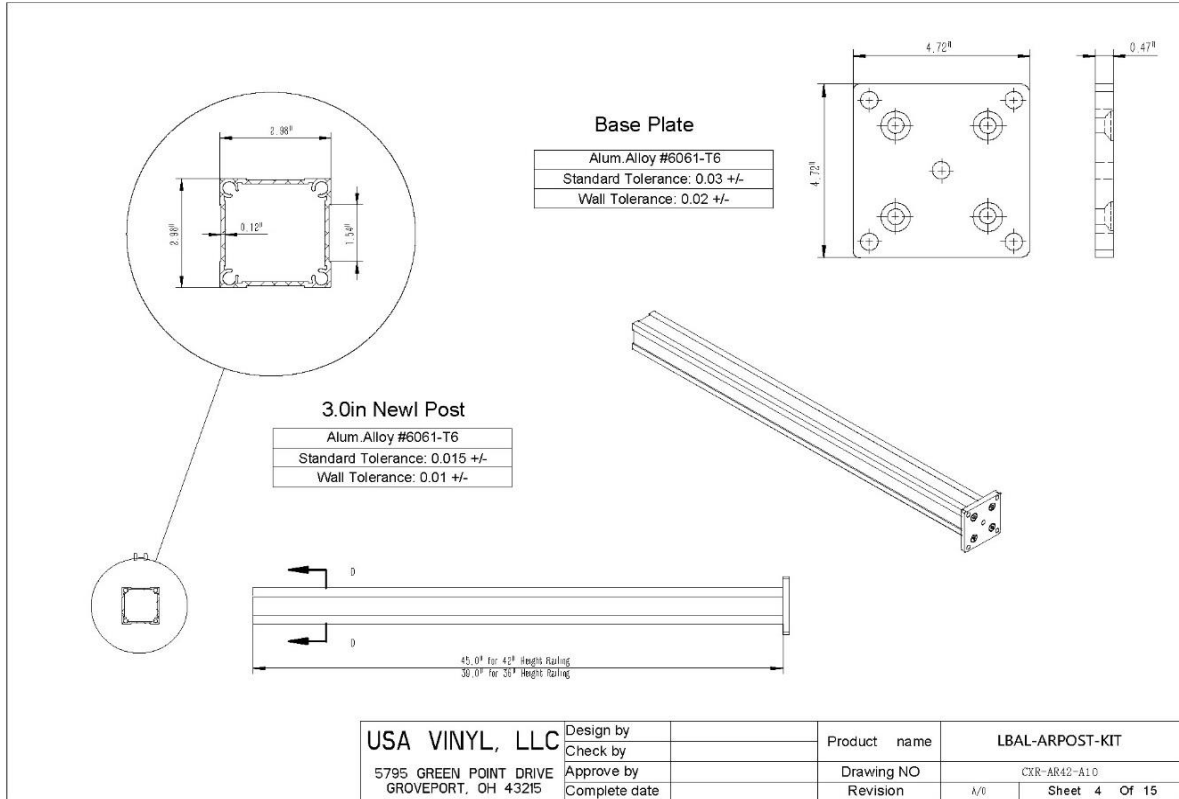

Test Report

Issue Date: 2021-05-13


Intertek Report No. 210422012SHF-001

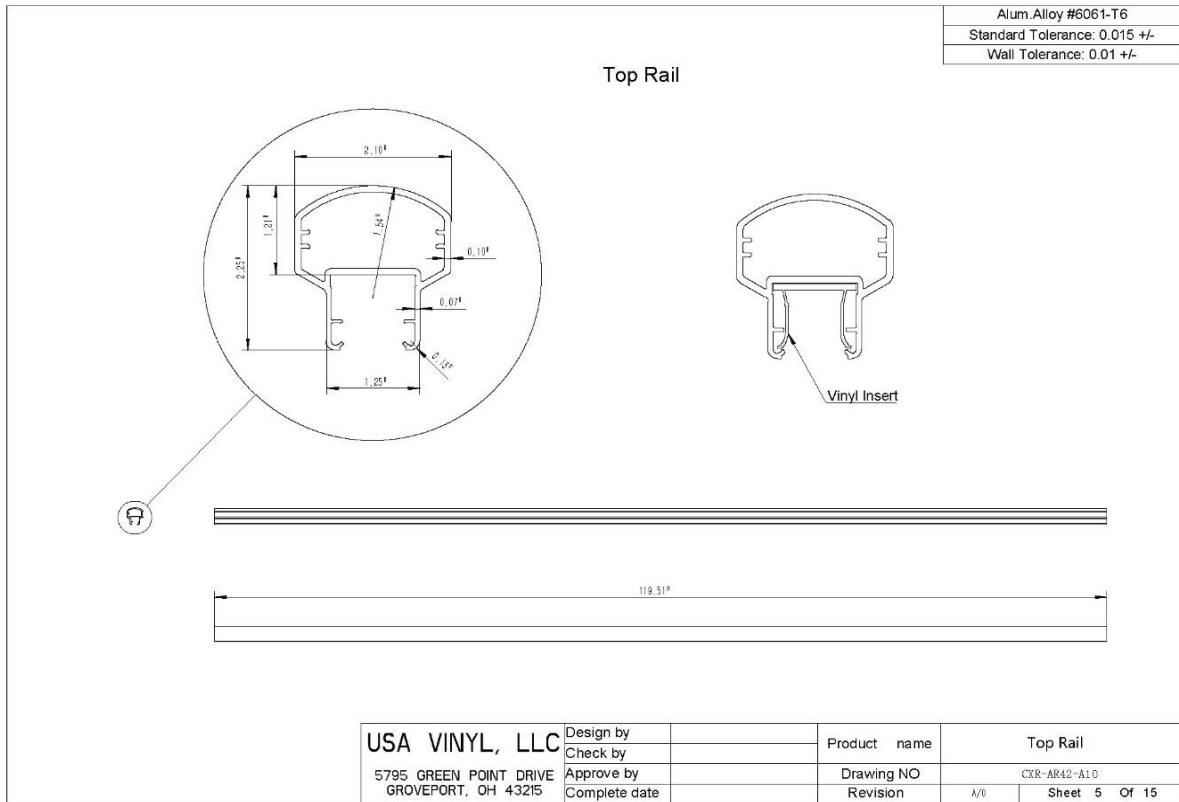

Test Report

Issue Date: 2021-05-13


Intertek Report No. 210422012SHF-001

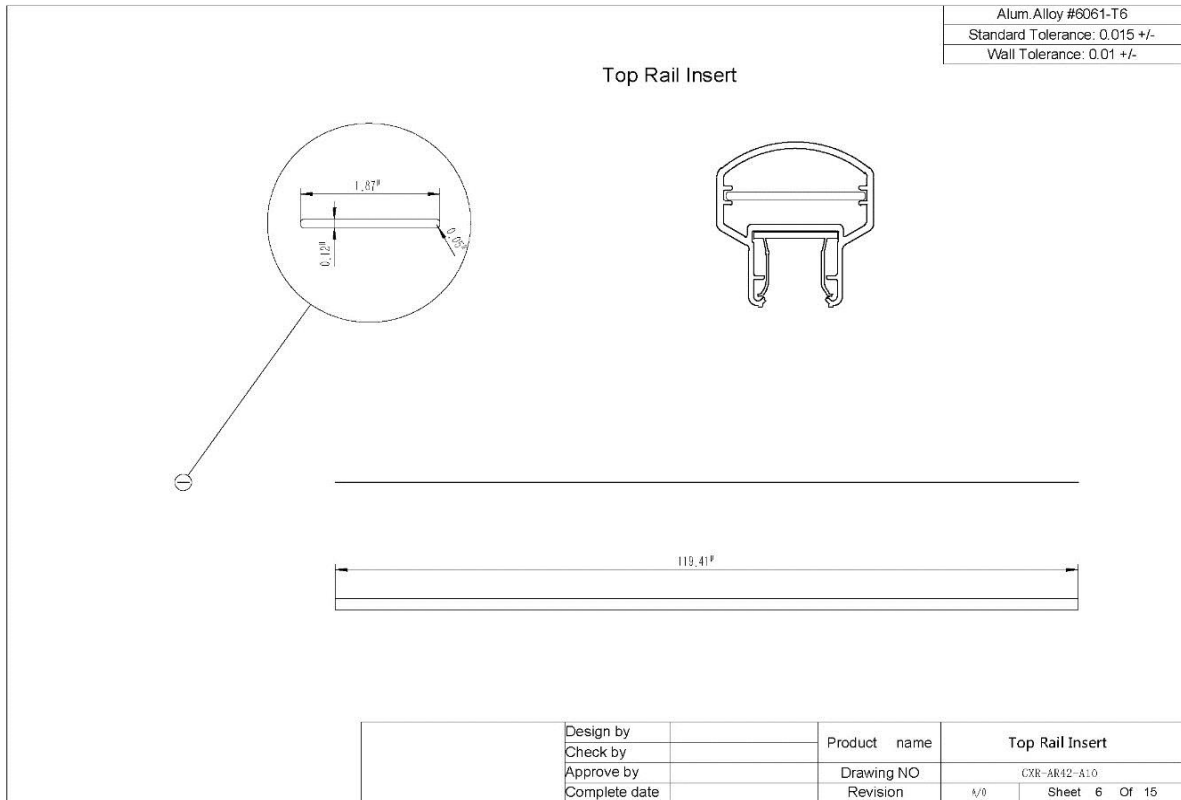

Test Report

Issue Date: 2021-05-13


Intertek Report No. 210422012SHF-001

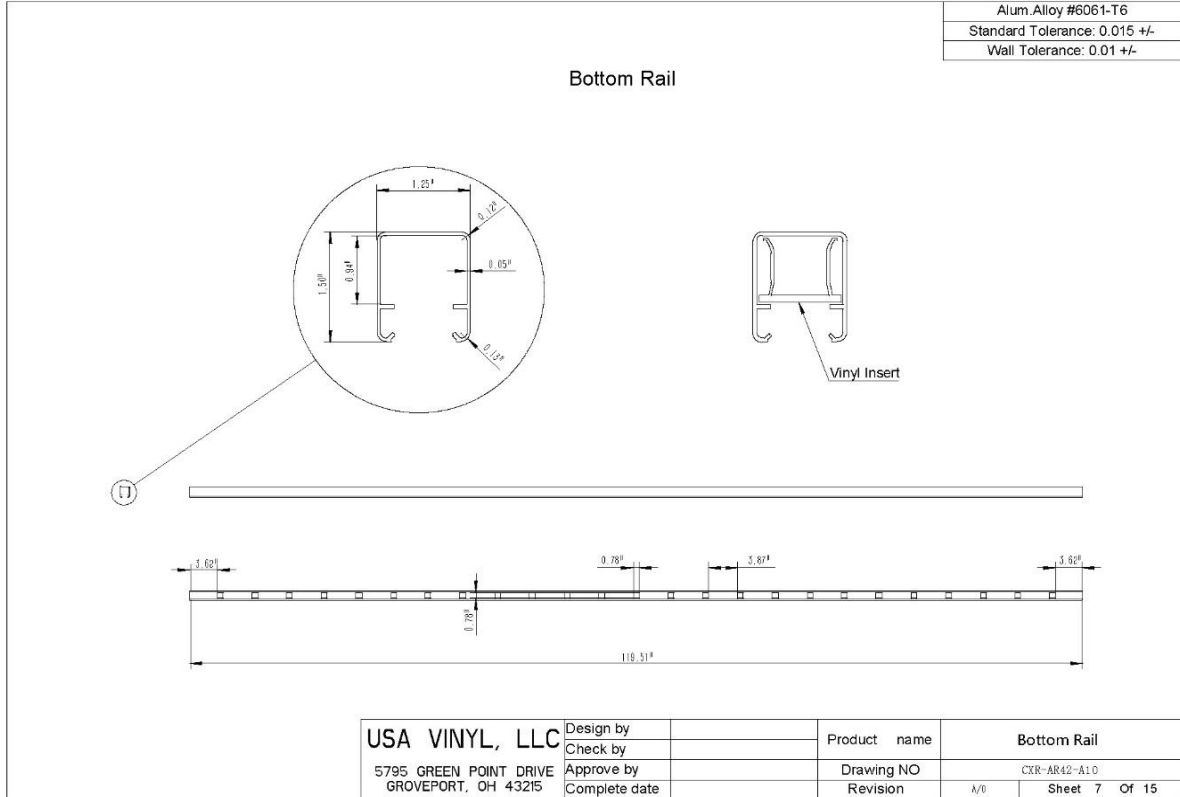

Test Report

Issue Date: 2021-05-13


Intertek Report No. 210422012SHF-001

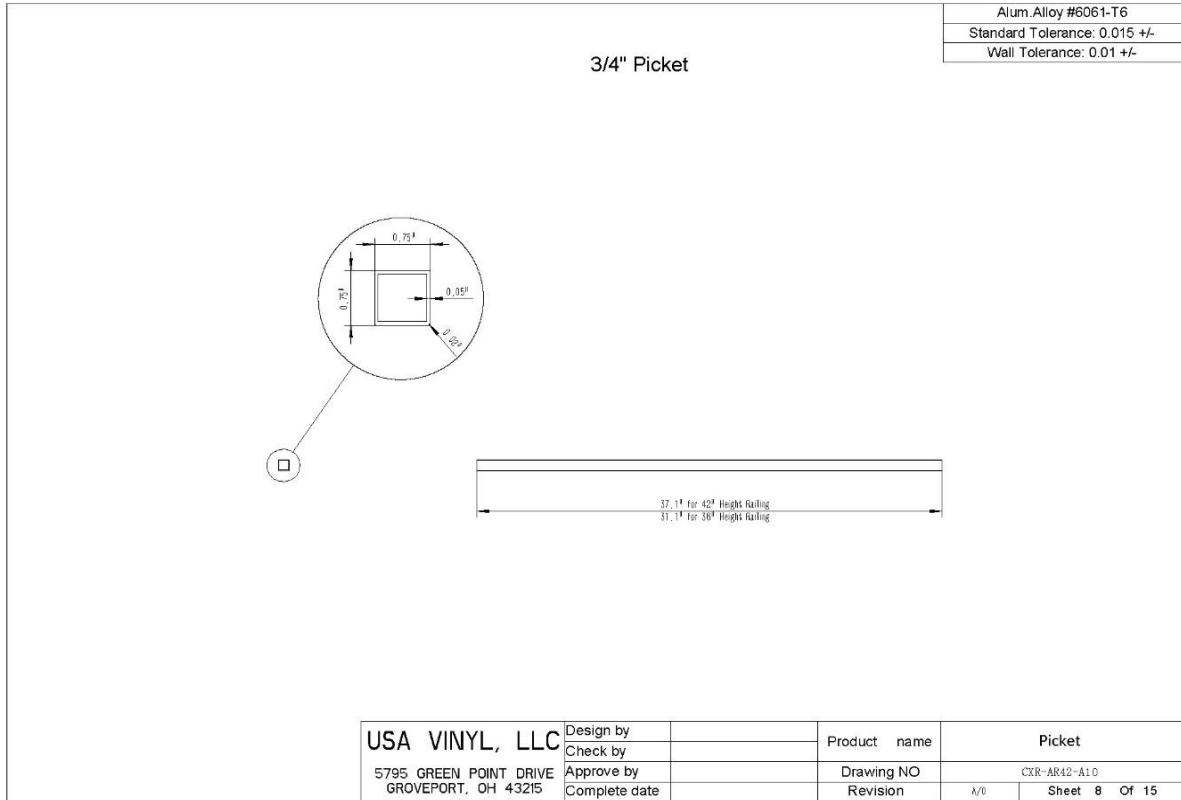

Test Report

Issue Date: 2021-05-13


Intertek Report No. 210422012SHF-001
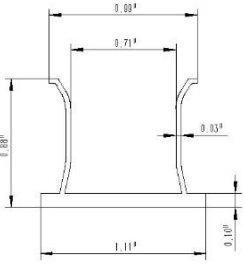
<p>Vinyl Insert</p> 		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2">Material: Vinyl</td> </tr> <tr> <td colspan="2">Standard Tolerance: 0.03 +/-</td> </tr> <tr> <td colspan="2">Wall Tolerance: 0.02 +/-</td> </tr> </table>		Material: Vinyl		Standard Tolerance: 0.03 +/-		Wall Tolerance: 0.02 +/-													
Material: Vinyl																					
Standard Tolerance: 0.03 +/-																					
Wall Tolerance: 0.02 +/-																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td rowspan="4" style="width: 30%; vertical-align: top;"> USA VINYL, LLC 5795 GREEN POINT DRIVE GROVEPORT, OH 43215 </td> <td style="width: 20%;">Design by</td> <td style="width: 20%;"></td> <td style="width: 30%;">Product name</td> <td style="text-align: center;">Vinyl Insert</td> </tr> <tr> <td>Check by</td> <td></td> <td>Drawing NO</td> <td style="text-align: center;">CXR-AR42-A10</td> </tr> <tr> <td>Approve by</td> <td></td> <td>Revision</td> <td style="text-align: center;">A/0</td> </tr> <tr> <td>Complete date</td> <td></td> <td>Sheet</td> <td style="text-align: center;">9 Of 15</td> </tr> </table>		USA VINYL, LLC 5795 GREEN POINT DRIVE GROVEPORT, OH 43215	Design by		Product name	Vinyl Insert	Check by		Drawing NO	CXR-AR42-A10	Approve by		Revision	A/0	Complete date		Sheet	9 Of 15			
USA VINYL, LLC 5795 GREEN POINT DRIVE GROVEPORT, OH 43215	Design by			Product name	Vinyl Insert																
	Check by			Drawing NO	CXR-AR42-A10																
	Approve by			Revision	A/0																
	Complete date		Sheet	9 Of 15																	

Test Report

Issue Date: 2021-05-13


Intertek Report No. 210422012SHF-001
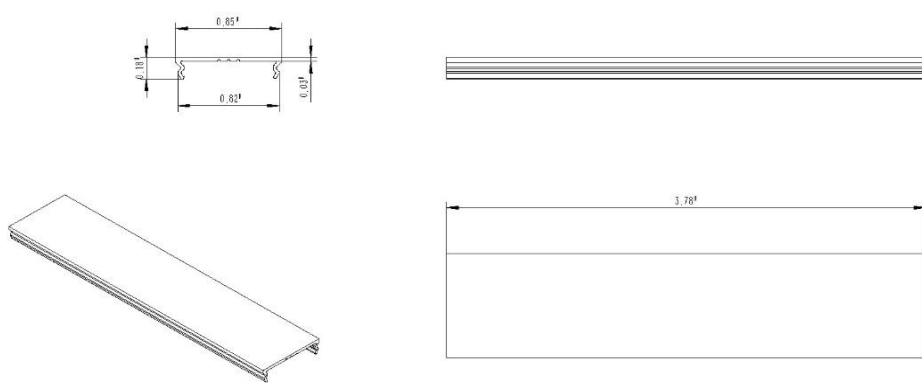
<p>Spacer</p> 		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">Alum Alloy #6061-T6</td> </tr> <tr> <td colspan="2" style="text-align: center;">Standard Tolerance: 0.015 +/-</td> </tr> <tr> <td colspan="2" style="text-align: center;">Wall Tolerance: 0.01 +/-</td> </tr> </table>		Alum Alloy #6061-T6		Standard Tolerance: 0.015 +/-		Wall Tolerance: 0.01 +/-																		
Alum Alloy #6061-T6																										
Standard Tolerance: 0.015 +/-																										
Wall Tolerance: 0.01 +/-																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td rowspan="4" style="width: 30%; vertical-align: top;"> <p>USA VINYL, LLC 5795 GREEN POINT DRIVE GROVEPORT, OH 43215</p> </td> <td style="width: 20%;">Design by</td> <td style="width: 20%;"></td> <td style="width: 20%;">Product name</td> <td colspan="2" style="text-align: center;">Spacer</td> </tr> <tr> <td>Check by</td> <td></td> <td>Drawing NO</td> <td colspan="2" style="text-align: center;">CXR-AR42-A1.0</td> </tr> <tr> <td>Approve by</td> <td></td> <td>Revision</td> <td style="text-align: center;">A/0</td> <td style="text-align: center;">Sheet 10 Of 15</td> </tr> <tr> <td>Complete date</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		<p>USA VINYL, LLC 5795 GREEN POINT DRIVE GROVEPORT, OH 43215</p>	Design by		Product name	Spacer		Check by		Drawing NO	CXR-AR42-A1.0		Approve by		Revision	A/0	Sheet 10 Of 15	Complete date								
<p>USA VINYL, LLC 5795 GREEN POINT DRIVE GROVEPORT, OH 43215</p>	Design by			Product name	Spacer																					
	Check by			Drawing NO	CXR-AR42-A1.0																					
	Approve by			Revision	A/0	Sheet 10 Of 15																				
	Complete date																									

Test Report

Issue Date: 2021-05-13


Intertek Report No. 210422012SHF-001

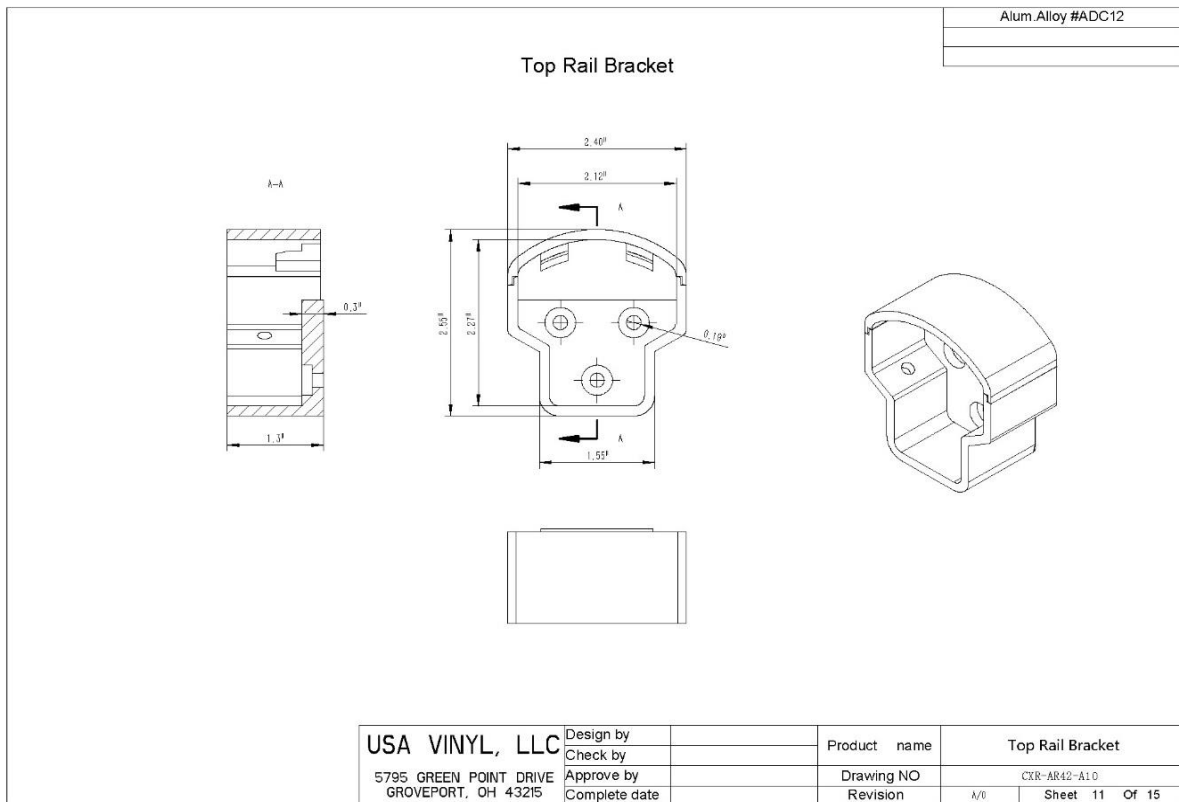

Test Report

Issue Date: 2021-05-13


Intertek Report No. 210422012SHF-001

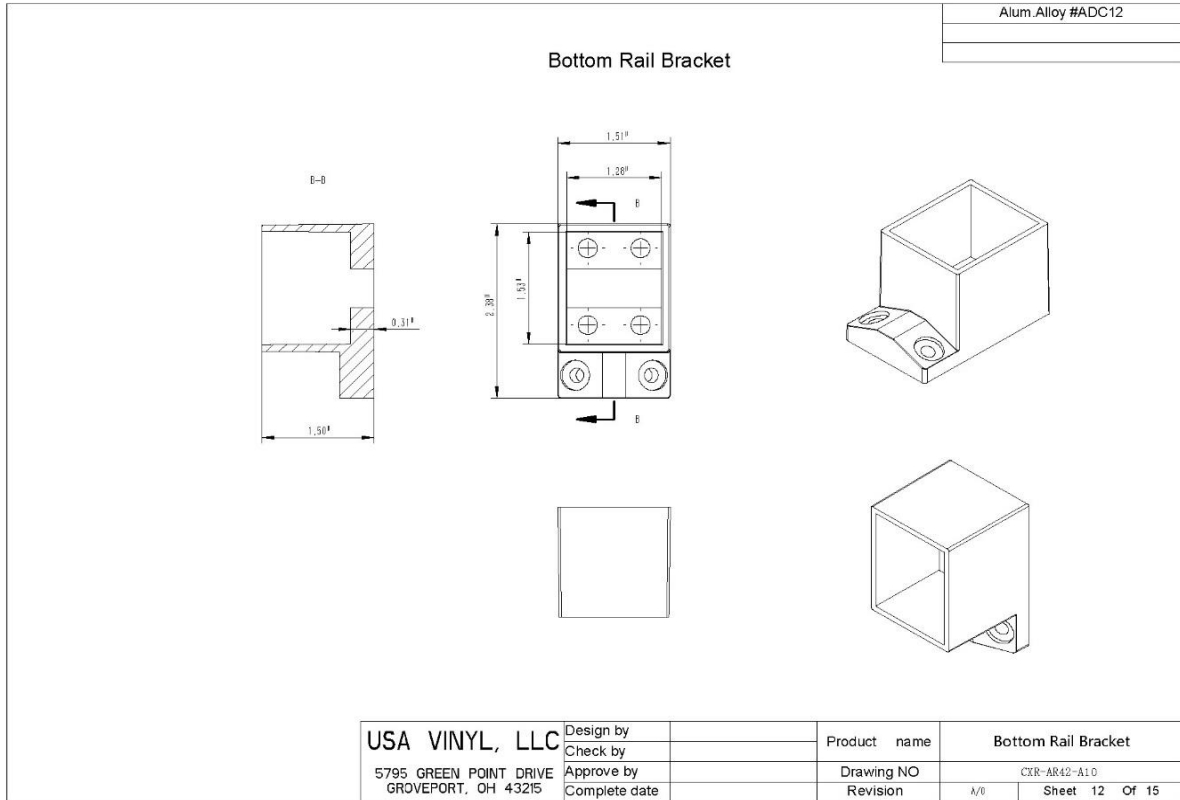

Test Report

Issue Date: 2021-05-13

Intertek Report No. 210422012SHF-001
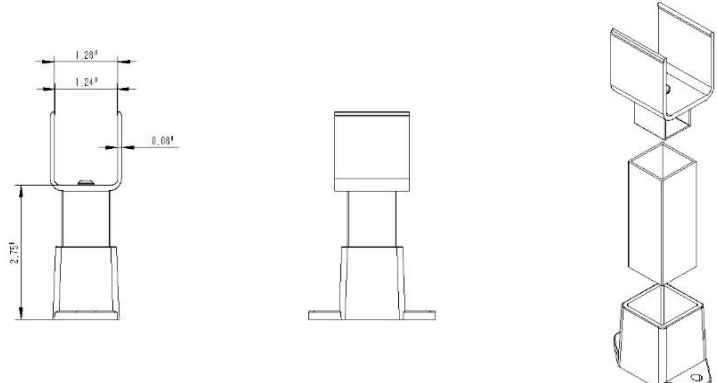
<h3>Bottom Rail Support</h3>		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="font-size: small;">Alum.Alloy #ADC12</td> </tr> <tr> <td style="font-size: small;">Alum.Alloy #6061-T6</td> </tr> </table>		Alum.Alloy #ADC12	Alum.Alloy #6061-T6																					
Alum.Alloy #ADC12																										
Alum.Alloy #6061-T6																										
																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td rowspan="4" style="width: 30%; vertical-align: top;"> USA VINYL, LLC 5795 GREEN POINT DRIVE GROVEPORT, OH 43215 </td> <td style="font-size: x-small;">Design by</td> <td style="width: 20%;"></td> <td rowspan="2" style="font-size: x-small;">Product name</td> <td colspan="2" style="text-align: center;">Support</td> </tr> <tr> <td style="font-size: x-small;">Check by</td> <td></td> <td style="font-size: x-small;">Drawing NO</td> <td colspan="2" style="text-align: center;">CXK-AR42-A10</td> </tr> <tr> <td style="font-size: x-small;">Approve by</td> <td></td> <td style="font-size: x-small;">Revision</td> <td style="text-align: center;">x/0</td> <td style="font-size: x-small;">Sheet</td> <td style="text-align: center;">13</td> </tr> <tr> <td style="font-size: x-small;">Complete date</td> <td></td> <td colspan="2"></td> <td style="font-size: x-small;">Of</td> <td style="text-align: center;">15</td> </tr> </table>		USA VINYL, LLC 5795 GREEN POINT DRIVE GROVEPORT, OH 43215	Design by		Product name	Support		Check by		Drawing NO	CXK-AR42-A10		Approve by		Revision	x/0	Sheet	13	Complete date				Of	15		
USA VINYL, LLC 5795 GREEN POINT DRIVE GROVEPORT, OH 43215	Design by			Product name		Support																				
	Check by				Drawing NO	CXK-AR42-A10																				
	Approve by			Revision	x/0	Sheet	13																			
	Complete date				Of	15																				

Test Report

Issue Date: 2021-05-13

Intertek Report No. 210422012SHF-001

		Alum Alloy #ADC12	
3" Post Cap			
USA VINYL, LLC 5795 GREEN POINT DRIVE GROVEPORT, OH 43215	Design by		Product name
	Check by		Post Cap
	Approve by		Drawing NO
	Complete date		Revision
			CXR-AR42-A1.0 /0 Sheet 14 Of 15

Test Report

Issue Date: 2021-05-13

Intertek Report No. 210422012SHF-001

Alum Alloy #ADC12

3" Post Trim

USA VINYL, LLC

5795 GREEN POINT DRIVE
GROVEPORT, OH 43215

Design by		Product name	Post Trim
Check by		Drawing NO	CXR-AR42-A10
Approve by		Revision	A/0
Complete date			Sheet 15 Of 15

Test Report

Issue Date: 2021-05-13

Intertek Report No. 210422012SHF-001

Appendix A: Sample Received Photo



Revision:

NO.	Date	Changes
210422012SHF-001	2021-05-13	First issue